

April 20, 2021

Re: Hangar Taxilane Expansion
Sturgis Municipal Airport
Sturgis, South Dakota
AIP # 3-46-0054-018-2021
A-8093

Bid Opening: **April 22, 2021**
2:00 pm Local Time

ADDENDUM NUMBER 1

The following modifications are made to the plans and specifications for the above referenced project.

PLANS

- 1. Sheet 9, Quantities, Adjust Item #4 to Read "Owner Furnished Borrow":**
The Contractor shall use leftover material from a previous project for the Owner Furnished Borrow Material. The material is located east of the taxilanes that shall remain open.
- 2. Sheet 9, Quantities, Add Item #2, Construction Staking:**
The Contractor is responsible for construction staking and a bid item has been added to reflect this change. Please also update the Item numbers on the remaining bid items.
- 3. Sheet 11, "Sta 4+97 14.5L to 4 + 97 171.5 L Furnish and Install 157 LF 4" Perforated Underdrain Piping" shall be replaced with "Sta 4+97 14.5L to 4 + 97 171.5 L Furnish and Install 158 LF 4" Solid Underdrain Piping"**
- 4. Sheet 14, Storm Water Pollution Prevention Plan, "Furnish and Install 912 S.Y. Type II Erosion Control Fabric" shall be replaced with "Furnish and Install 916 S.Y. Type II Erosion Control Fabric"**

CONTRACT DOCUMENTS AND TECHNICAL SPECIFICATIONS

1. Page 302 and 303 of 353, Replace Proposal form with the attached sheets.

The Contractor is responsible for construction staking and bid item #2 has been added to reflect this change. The Contractor shall also use leftover material from a previous project for the Owner Furnished Borrow Material. The attached Bid Form has been updated to reflect these changes.

CLARIFICATIONS

1. Sheet 3 of the Construction Plans, Safety Plan.


The fence adjacent to the project area will be required to be removed and replaced by the contractor or a temporary gate will be required as part of the Safety Plan.

2. Sheet 11 of the Construction Plans, Note: Light Pole to be Removed, Salvaged, and Replaced.

The Contractor shall relocate the light pole approximately 50 feet. The pole shall be relocated to the northeast and placed outside of the TOFA. The new location will be located in the field during construction.

3. Item C-105, Mobilization. Mobilization shall be limited to 20 percent of the total project cost.

ALL OTHER ITEMS OF THE PLANS AND SPECIFICATIONS REMAIN UNCHANGED

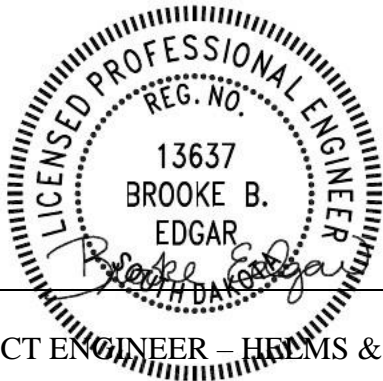

BY: _____

PROJECT ENGINEER – HELMS & ASSOCIATES

Acknowledge receipt of the Addendum by inserting its number on the Bid Form. Failure to do so may subject bidder to disqualification. This Addendum forms a part of the Contract Documents. It modifies them as above.

**HANGAR TAXILANE EXPANSION
STURGIS MUNICIPAL AIRPORT
AIP #3-46-0054-018-2021
A-8093**

Base Bid

Item No.	Spec No.	Item Description	Quantity	Unit	Unit Price	Total Unit Cost
1	GP-105	Mobilization	1	L.S.	\$	\$
2	GP-50	Construction Staking	1	L.S.	\$	\$
3	S-100	Construction Safety Phasing Plan	1	L.S.	\$	\$
4	P-152	Unclassified Excavation	2,066	CuYd	\$	\$
5	P-152	Contractor Furnished Borrow	1,072	CuYd	\$	\$
6	P-154	Subbase Course	1,040	CuYd	\$	\$
7	P-154	Geogrid	1,710	SqYd	\$	\$
8	P-154	Geotextile Separator Fabric	1,710	SqYd	\$	\$
9	P-208	Aggregate Base Course	473	CuYd	\$	\$
10	P-602	Asphalt Prime Coat	2	Ton	\$	\$
11	D-705	4" Perforated Underdrain Piping	954	Ft	\$	\$
12	D-705	4" Solid Underdrain Piping	158	Ft	\$	\$
13	D-705	4" Tee	2	Each	\$	\$
14	D-705	Underdrain Cleanout	4	Each	\$	\$
15	T-901	Seeding and Fertilizing	2.0	Acre	\$	\$
16	T-905	Topsoiling	857	CuYd	\$	\$
17	T-908	Mulching	7,890	SqYd	\$	\$
18	TL-100	Field Laboratory, Type I	1	Each	\$	\$
19	Plans	Remove, Salvage, and Replace Light Pole	1	Each	\$	\$
20	Plans	Underdrain Outlet Structure	1	Each	\$	\$
21	Plans	Type II Erosion Control Blanket	916	SqYd	\$	\$
Base Bid Total					\$	

Subtotal Base Bid items 1 – 21 inclusive \$ _____

Total Base Bid, Written: _____ Dollars

All Items Furnished and Installed

*For Base Bid, Unit Prices will govern where used. Incorrect extensions or totals will be corrected and the corrected figures will be used in determining the low bidder. Final contract amount after construction will be determined based upon final quantities and unit price.

Alternate Bid 1

Item No.	Spec No.	Item Description	Quantity	Unit	Unit Price	Total Unit Cost
A1	GP-105	Mobilization	1	L.S.	\$	\$
A2	P-208	Aggregate Base Course (deduct from Base Bid)*	(189)	CuYd	\$	\$
A3	P-403	Asphalt Base/Surface Course	369	Ton	\$	\$
A4	P-603	Emulsified Asphalt Tack Coat	1	Ton	\$	\$
A5	P-620	Pavement Marking	1	L.S.	\$	\$
Alternate Bid 1 Total					\$	

* The Aggregate Base Course (Deduct from Base Bid) shall be the same unit price as in the Base Bid and shall be a deduct in the Alternate Bid 1.

Subtotal Alternate Bid 1, items A1-A5 inclusive \$ _____

Total Alternate Bid 1, Written: _____ Dollars

All Items Furnished and Installed

*For Alternate Bid, Unit Prices will govern where used. Incorrect extensions or totals will be corrected and the corrected figures will be used in determining the low bidder. Final contract amount after construction will be determined based upon final quantities and unit price.