

February 21, 2025

**RE: UTILITY IMPROVEMENTS – PHASE III
 ELKTON, SOUTH DAKOTA
 SPN #16409**

BID LETTING: THURSDAY, FEBRUARY 27, 2025 @ 2:00 PM CST

ADDENDUM NUMBER 1

The following modifications are to be made to the plans and specifications for the Utility Improvements - Phase III Project.

SPECIFICATIONS:

Section C-410, Bid Form, Page 6, Bid Item 106 shall be revised to the following:

Item	SDDOT Bid Item #	Description	Quantity	Unit Price	Total Price
106	732E0250	Fiber Mulching	9,750 Lb		

Section C-520, Agreement Between Owner and Contractor for Construction Contract, Page 2, Paragraph 4.2 A - shall be deleted in its entirety and replaced with following:

4.1 Contract Times: Dates

- A. The Work will be substantially complete on or before **November 1, 2026**, and completed and ready for final payment in accordance with Paragraph 15.06 of the General Conditions within 30 days of the Date of Substantial Completion.

Section 33 05 61, Concrete Manholes, Paragraphs 2.05 A, B, C and D – shall be deleted in its entirety and replaced with the following:

2.05 MANHOLE WALL JOINT AND CASTING SEALANT

- A. Flexible gasket material for sealing manhole wall joints and casting shall be RAM-NEK as manufactured by K.Y. Snyder Company, Inc., Houston, Texas; ConSeal CS-202 as manufactured by Concrete Sealants, Inc., New Carlisle, Ohio; or approved equal.

Section 33 11 00, Water Utility Distribution Piping, Paragraph 2.02 A – shall be deleted in its entirety and replaced with the following:

2.02 PRESSURIZED POLYVINYL CHLORIDE (PVC) PIPE

- A. Polyvinyl Chloride pipe shall be C900, DR 25 rated pipe conforming to the requirements of AWWA C-900.

Section 33 14 17, Water Service Laterals, Paragraph 2.08 D – shall be deleted in its entirety and replaced with the following:

2.08 YARD HYDRANTS

- D. Yard hydrants shall be the freeze-less Model 2000 as manufactured by Merrill Manufacturing, Storm Lake, Iowa, or Engineer approved equal.

PLANS:

PLAN SHEET 4 ESTIMATE OF QUANTITIES:

Item 106 shall be revised to the following:

Item	SDDOT Bid Item #	Description	Quantity
106	732E0250	Fiber Mulching	9,750 Lb

PLAN SHEET 21 ELK STREET JOINT LAYOUT:

The transverse joints in the 8" nonreinforced PCC pavement shall include dowel baskets as detailed on sheet 80 of the plans. Dowel baskets shall be considered incidental to the 8" nonreinforced PCC pavement.

The longitudinal joints in the 8" nonreinforced PCC pavements shall include tie bars as detailed on sheets 83-85. Tie bars shall be considered incidental to the 8" nonreinforced PCC pavement.

DETAILS:

The attached detail is provided to clarify payment for the Type C Concrete Retaining Wall.

All other items of the plans and specifications remain unchanged.

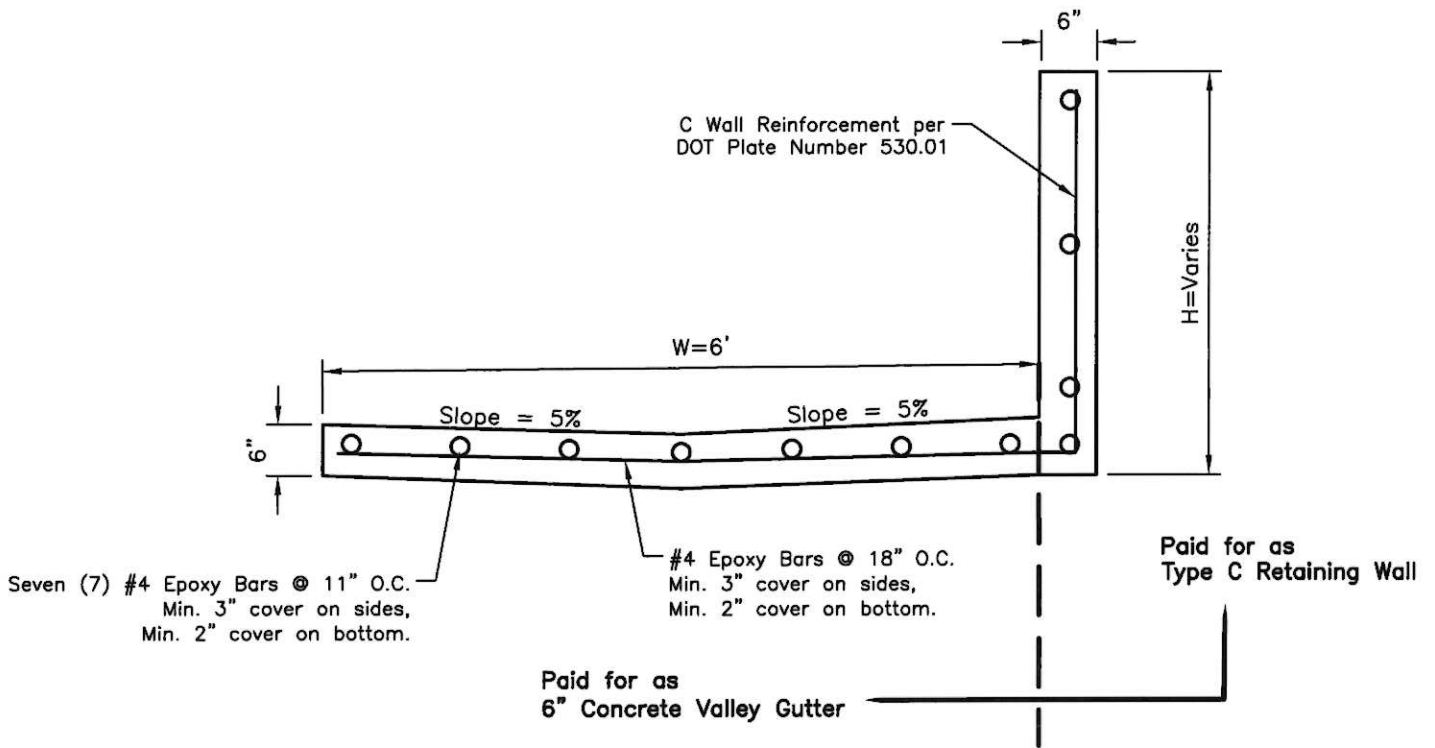

Jeffrey P. McCormick, Project Engineer
Schmucker, Paul, Nohr & Associates



The undersigned hereby acknowledges receipt of Addendum Number 1 to the plans and specifications for the *ELKTON UTILITY IMPROVEMENTS – PHASE III*.

FIRM NAME _____
BY _____
TITLE _____
DATE _____

ATTACH THIS SIGNED ADDENDUM NO. 1 TO THE BID FORM WHEN SUBMITTING.



SECTION VIEW OF TYPE C WALL
MONOLITHIC WITH VALLEY GUTTER

(SCALE: NONE)



SPN

& Associates

Engineers, Planners and Surveyors

2100 North Sanborn Blvd. - P.O. Box 398

Mitchell, South Dakota 57301

Phone: (605) 996-7761

Fax: (605) 996-0015