

July 2, 2024

**RE: WALNUT AVENUE WATER DISTRIBUTION AND STREET
IMPROVEMENTS**

**WAGNER, SOUTH DAKOTA
SPN #16394**

BID LETTING: TUESDAY, JULY 9, 2024 @ 2:00 PM

ADDENDUM NUMBER 1

The following modifications are to be made to the plans and specifications for the Walnut Avenue Water Distribution and Street Improvements Project.

PLANS

Sheet 18

The note stating "Furnish and Install – 29 LF 6" PVC Water Main" shall be replaced with the following:

"Furnish and Install – 66 LF 6" PVC Water Main"

The note stating "Furnish and Install – 20 LF 12" PVC Casing Pipe" shall be replaced with the following:

"Furnish and Install – 20 LF 14" PVC Casing Pipe"

SPECIFICATIONS

Section C-410 - Bid Form, page 2 shall be deleted in its entirety and replaced with the attached bid form page 2. The changes to the bid form are listed below:


Item 17 "12" PVC Encasement Pipe" was removed and replaced with "14" PVC Encasement Pipe".


The quantity for item 19 "6" PVC Water Main" was adjusted from 35 Ft to 74 Ft.

Section 33 14 13 - Water Distribution Piping Paragraph 2.07.A shall be deleted in its entirety and replaced with the following:

- A. PVC casing pipe shall conform to DR 18 C900 conforming to the requirements of ASTM 1784. Minimum casing interval dimensions shall be not less than the outside diameter of the carrier pipe bell plus two (2) inches or approved equal substitution.

All other items of the plans and specifications remain unchanged.


Jacob D. Sonne, Project Engineer
Schmucker, Paul, Nohr & Associates

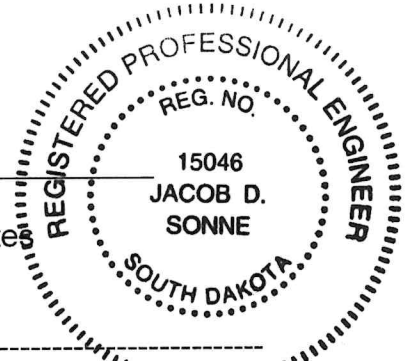

The undersigned hereby acknowledges receipt of Addendum Number 1 to the plans and specifications for the *WALNUT AVENUE WATER DISTRIBUTION AND STREET IMPROVEMENTS*.

FIRM NAME _____
BY _____
TITLE _____
DATE _____

ATTACH THIS SIGNED ADDENDUM NO. 1 TO THE BID FORM WHEN SUBMITTING.

Bid Schedule A

Item #	SDDOT Bid Item #	Description	Quantity	Unit Price	Total Price
1	009E0010	Mobilization	1 LS		
2	110E0300	Remove Concrete Curb and/or Gutter	336.0 Ft		
3	110E0460	Remove Manhole	1 Each		
4	110E1010	Remove Asphalt Concrete Pavement	7,002.0 SqYd		
5	110E1100	Remove Concrete Pavement	562.0 SqYd		
6	110E1130	Remove Concrete Driveway Pavement	70.0 SqYd		
7	110E1140	Remove Concrete Sidewalk	183.0 SqYd		
8	110E1910	Remove Fire Hydrant	1 Each		
9	110E1965	Remove Gate Valve	1 Each		
10	120E0010	Unclassified Excavation	2,560 CuYd		
11	260E1010	Base Course	3,929.3 Ton		
12	260E2010	Gravel Cushion	1,049.5 Ton		
13	320E1050	Class E Asphalt Concrete	1,720.0 Ton		
14	380E0050	8" Nonreinforced PCC Pavement	1,472.9 SqYd		
15	380E3020	6" PCC Driveway Pavement	54.7 SqYd		
16	380E4050	8" PCC Fillet Section	134.8 SqYd		
17	451E0014	14" PVC Encasement Pipe	20 Ft		
18	451E0604	4" PVC Water Main	21 Ft		
19	451E0606	6" PVC Water Main	74 Ft		
20	451E0608	8" PVC Water Main	1,806 Ft		
21	451E1008	8" PVC Sewer Pipe	56 Ft		
22	451E2207	6"x6" Pipe Tee	1 Each		
23	451E2212	8"x4" Pipe Tee	1 Each		
24	451E2214	8"x8" Pipe Tee	2 Each		
25	451E2313	8"x6" Pipe Reducer	4 Each		